





LO SERIE

INTERCOOLER® | **AC-DIRECT®**
HIGH PERFORMANCE COOLING SYSTEM | ALTERNATIVE CURRENT DIRECT DRIVER


DRIVERLESS®
REGULATION

Model No	Input Voltage	Power	Angle	Color/Kelvin	Luminous Flux (LED)	IP Rating	Dimensions (mm)	Cos ϕ	Weight/Kg
LO-600-15	220/240VAC	15W	120°	4000 ~ 6500	2400 Lumens	20/65*	L600,0 X Dia 60,0	>0,98	1,50
LO-1200-30	220/240VAC	30W	120°	4000 ~ 6500	3250 Lumens	20/65*	L1200,0 X Dia 60,0	>0,98	2,50
LO-1200-45	220/240VAC	45W	120°	4000 ~ 6500	4000 Lumens	20/65*	L1200,0 X Dia 60,0	>0,98	2,50
LO-1200-60	220/240VAC	60W	120°	4000 ~ 6500	5250 Lumens	20/65*	L1200,0 X Dia 60,0	>0,98	2,50

(*) Optional IP Rating

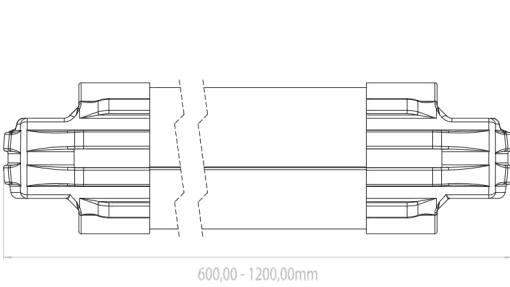

LIGHT DISTRIBUTION CURVE (LED)

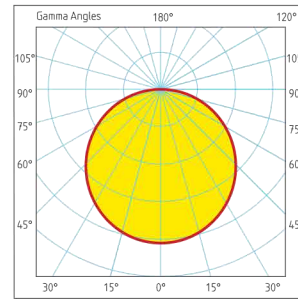

LED AYDINLATMA / LED LIGHTING

- | İç ve Dış Aydınlatmalar
- | Indoor & Outdoor Lightings
- | Ofisler
- | Offices
- | Hotel & Restaurant
- | Garaj, Asansörler ve Otoparklar
- | Garages, Elevators and Parks
- | Mimari Aydınlatmalar
- | Architectural Lightings
- | Bahçe Aydınlatmaları
- | Garden Lightings

MADE IN TURKEY

johnsonled.com.tr