





GLX SERIE

AC-DIRECT®
ALTERNATIVE CURRENT DIRECT DRIVERDRIVERLESS®
REGULATION

Model No	Input Voltage	Power	Angle	Color/Kelvin	Luminous Flux (LED)	IP Rating	Dimensions (mm)	Cos ϕ	Weight/Kg
GLX-600-30	220/240VAC	30W	120°	4000 ~ 6500	2400 Lumens	20	W200.0 X L600.0 X H120.0	>0,98	2,00
GLX-1200-30	220/240VAC	30W	120°	4000 ~ 6500	2400 Lumens	20	W200.0 X L1200.0 X H120.0	>0,98	3,00
GLX-1200-45	220/240VAC	45W	120°	4000 ~ 6500	3750 Lumens	20	W200.0 X L1200.0 X H120.0	>0,98	3,00

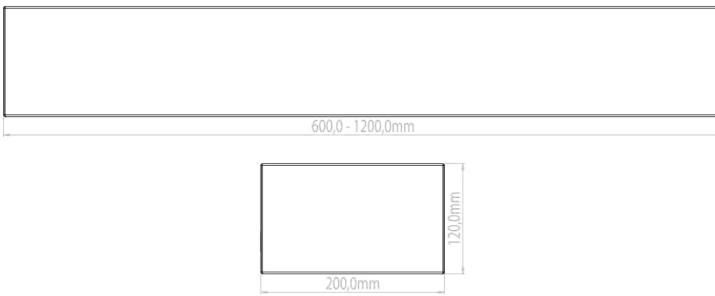

LIGHT DISTRIBUTION CURVE (LED)



LED AYDINLATMA / LED LIGHTING

- | İç ve Dış Aydınlatmalar
- | Indoor & Outdoor Lightings
- | Ofisler
- | Offices
- | Hotel & Restaurant
- | Garaj, Asansörler ve Otoparklar
- | Garages, Elevators and Parks
- | Mimari Aydınlatmalar
- | Architectural Lightings
- | Bahçe Aydınlatmaları
- | Garden Lightings



MADE IN TURKEY

johnsonled.com.tr

